

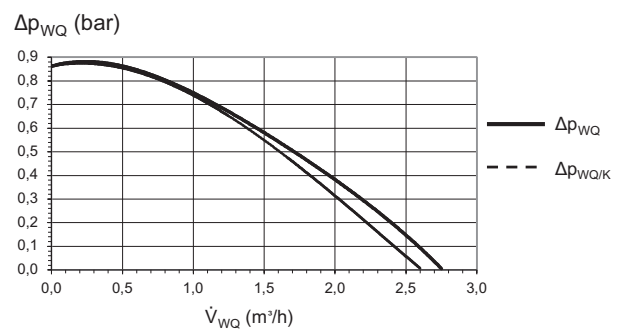
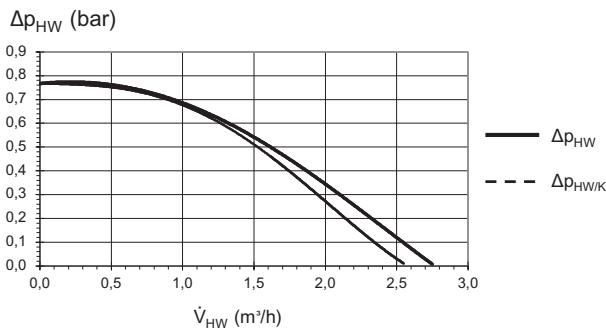
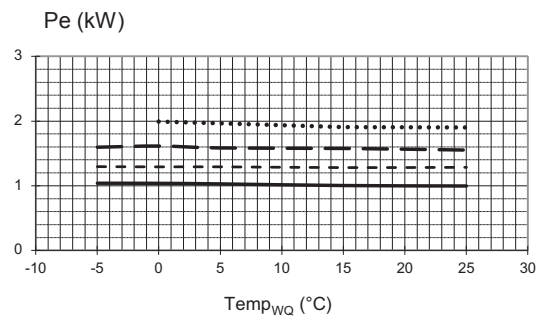


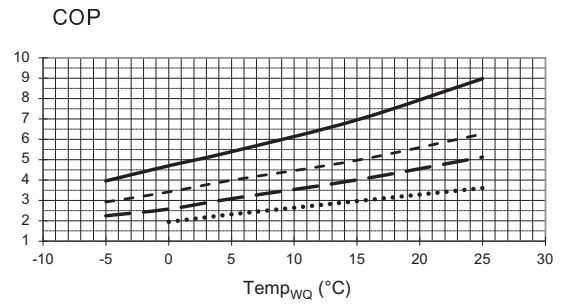

Performance curves

SWC 42(H)(K)3

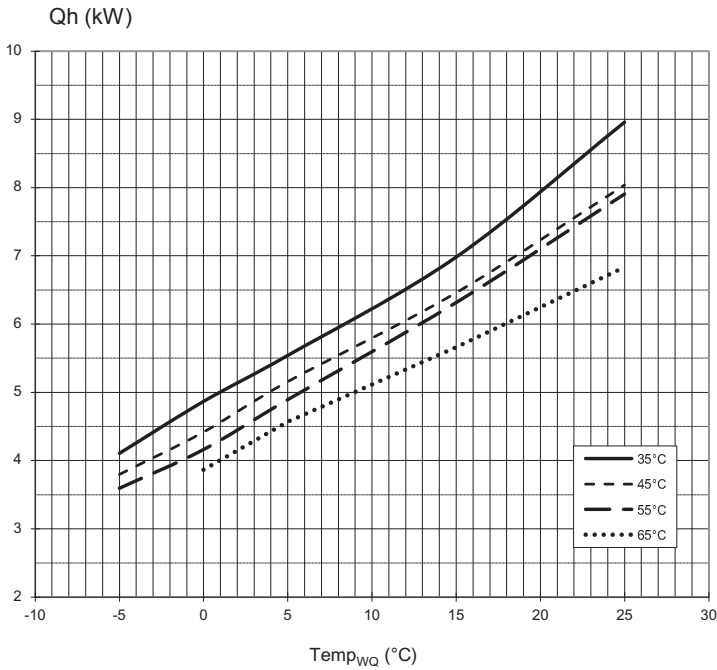






823239

- Key: DE823000L/170408
- \dot{V}_{HW} Heating water volume flow rate
 - \dot{V}'' Heat source volume flow rate
 - $Temp_{WQ}$ Heat source temperature
 - Q_h Heating capacity
 - P_e Power consumption
 - COP Coefficient of performance
 - $\Delta p_{HW} / \Delta p_{HW/K}$ Heating circuit free pressure / Heating circuit with cooling free pressure
 - $\Delta p_{WQ} / \Delta p_{WQ/K}$ Heat source free pressure / Heat source with cooling free pressure



SWC 62(H)(K)3

Performance curves

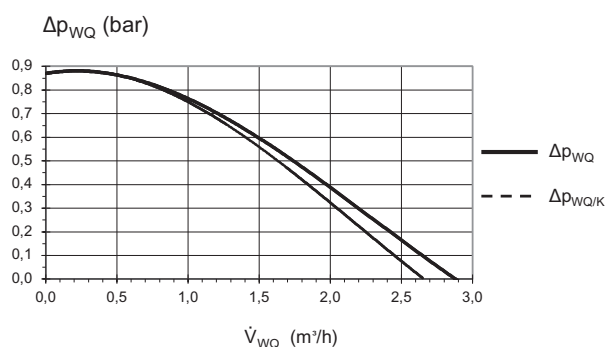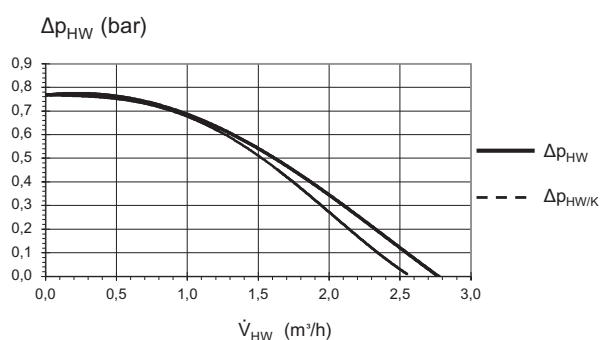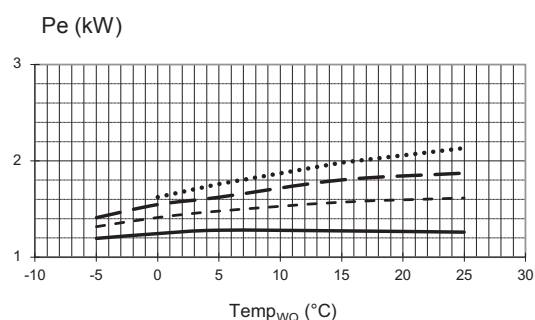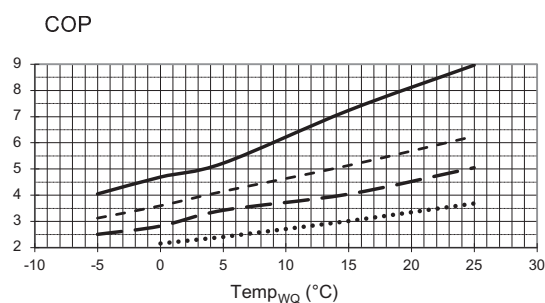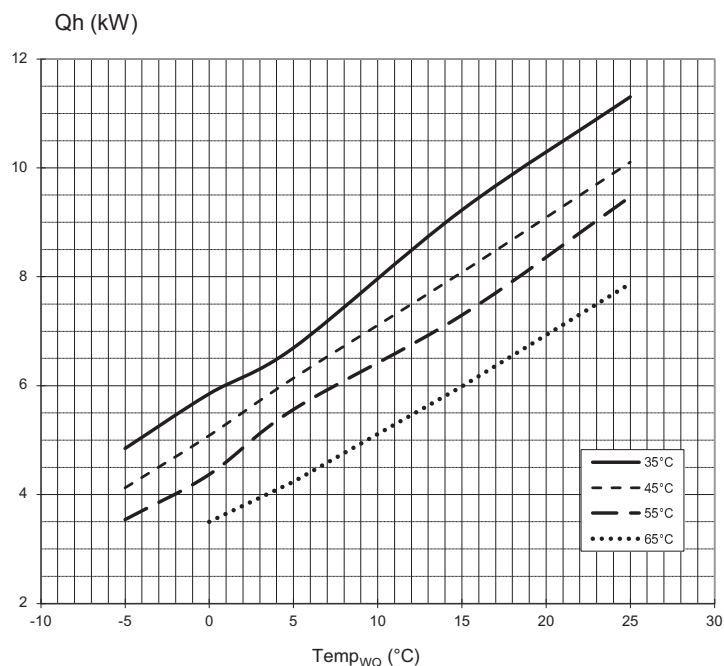






823240

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{wQ}$	Heat source temperature
Q_h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{wQ} / \Delta p_{wQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

SWC 82(H)(K)3

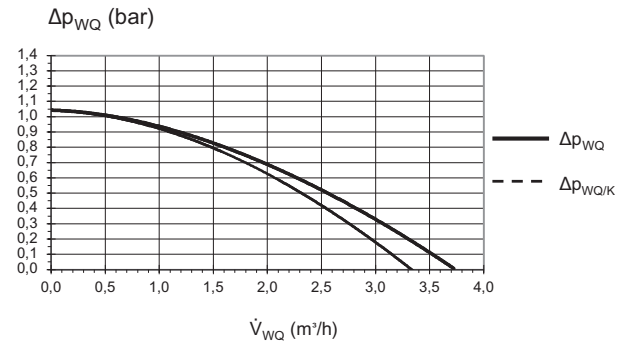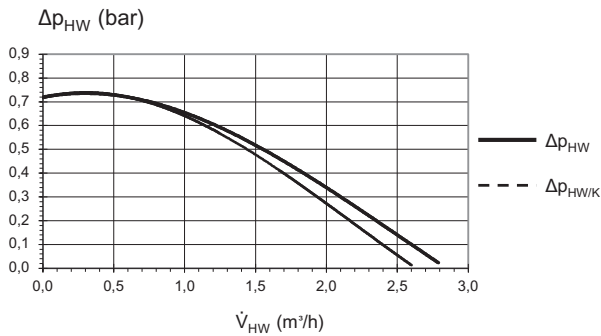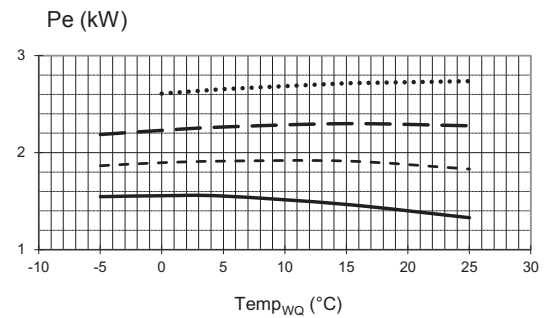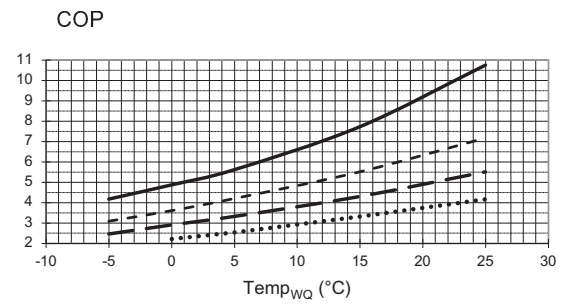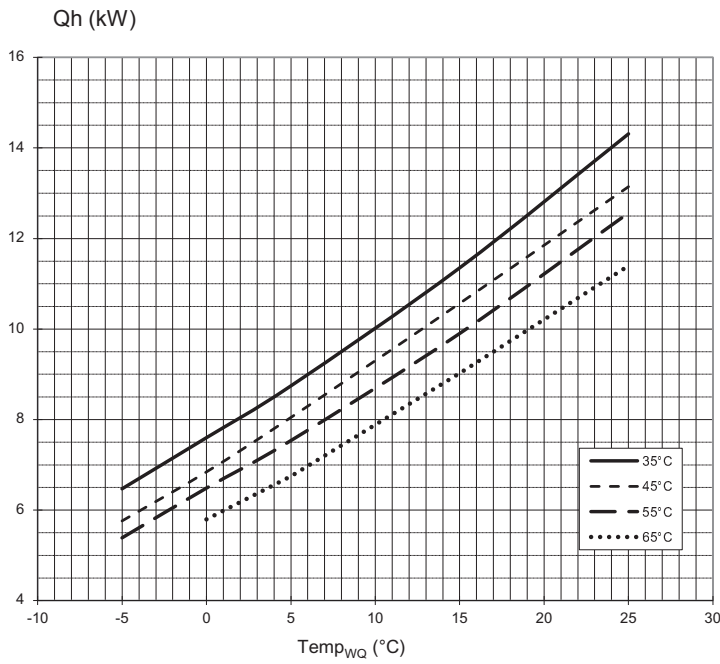






823241

- Key: DE823000L/170408
- \dot{V}_{HW} Heating water volume flow rate
 - \dot{V}'' Heat source volume flow rate
 - $Temp_{WQ}$ Heat source temperature
 - Q_h Heating capacity
 - P_e Power consumption
 - COP Coefficient of performance
 - $\Delta p_{HW} / \Delta p_{HW/K}$ Heating circuit free pressure / Heating circuit with cooling free pressure
 - $\Delta p_{WQ} / \Delta p_{WQ/K}$ Heat source free pressure / Heat source with cooling free pressure



SWC 102(H)(K)3

Performance curves

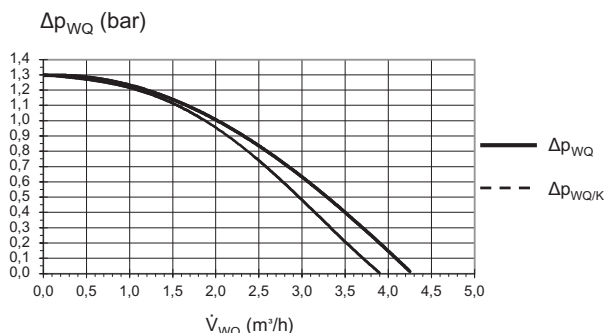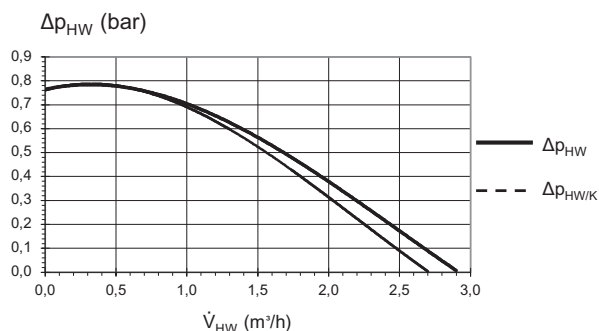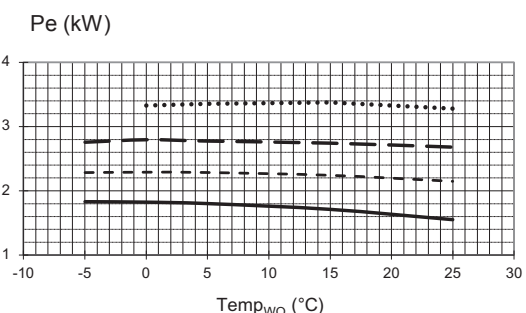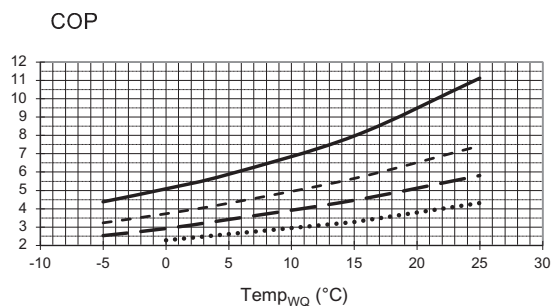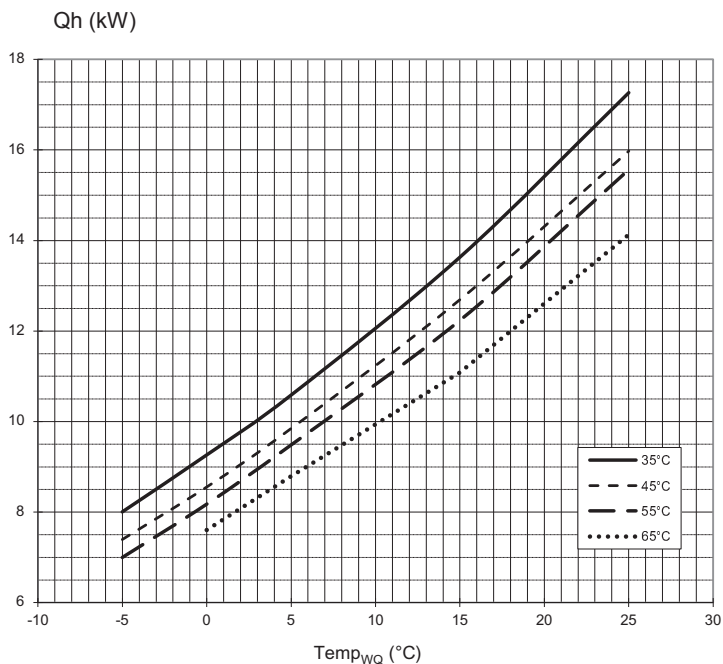






823242

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{WQ}$	Heat source temperature
Q_h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

SWC 122(H)(K)3

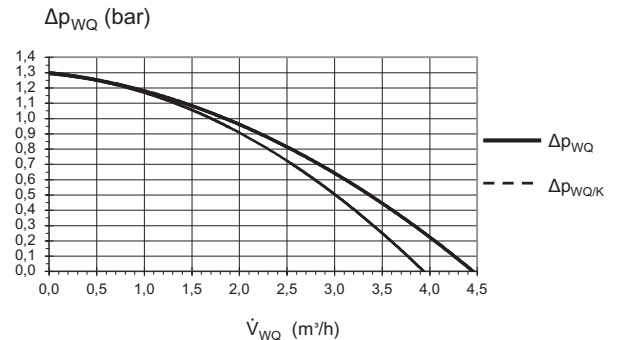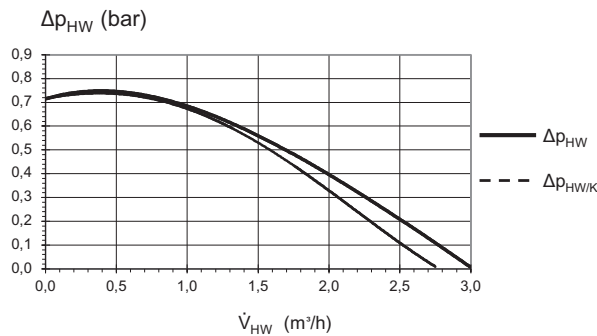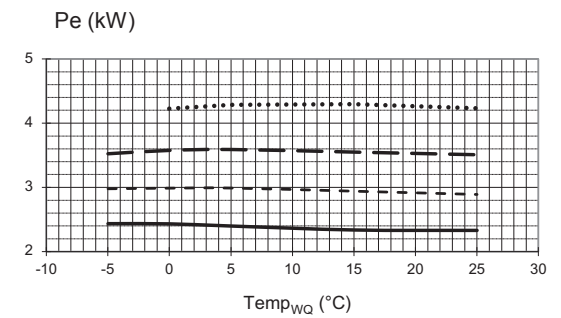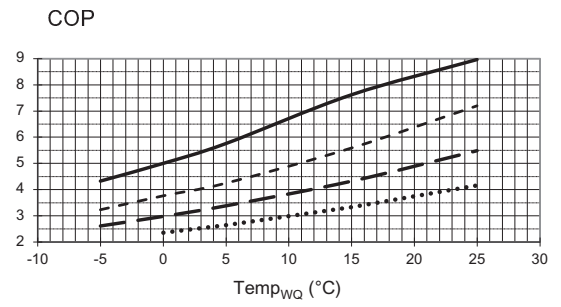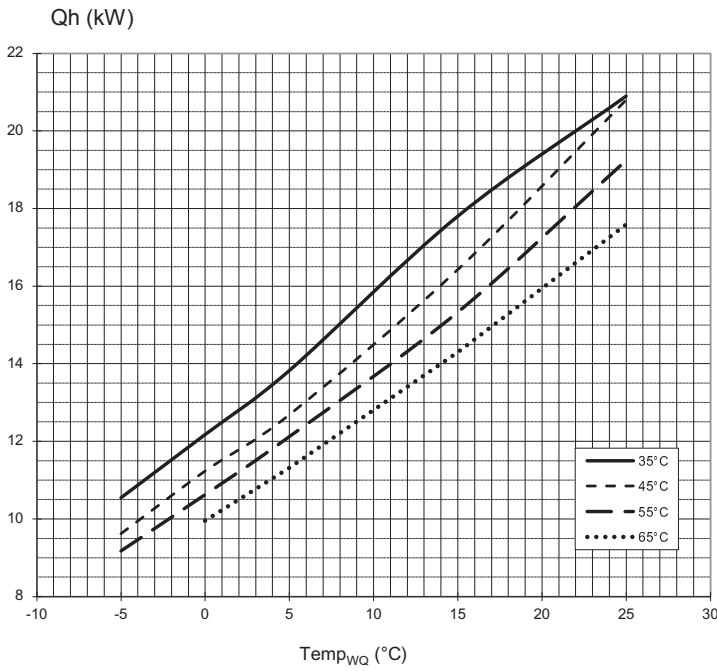

823243


- Key:
- DE823000L/170408
 - \dot{V}_{HW} Heating water volume flow rate
 - \dot{V}'' Heat source volume flow rate
 - $Temp_{wQ}$ Heat source temperature
 - Q_h Heating capacity
 - Pe Power consumption
 - COP Coefficient of performance
 - $\Delta p_{HW} / \Delta p_{HW/K}$ Heating circuit free pressure / Heating circuit with cooling free pressure
 - $\Delta p_{wQ} / \Delta p_{wQ/K}$ Heat source free pressure / Heat source with cooling free pressure




SWC 142(H)(K)3

Performance curves


Qh (kW)

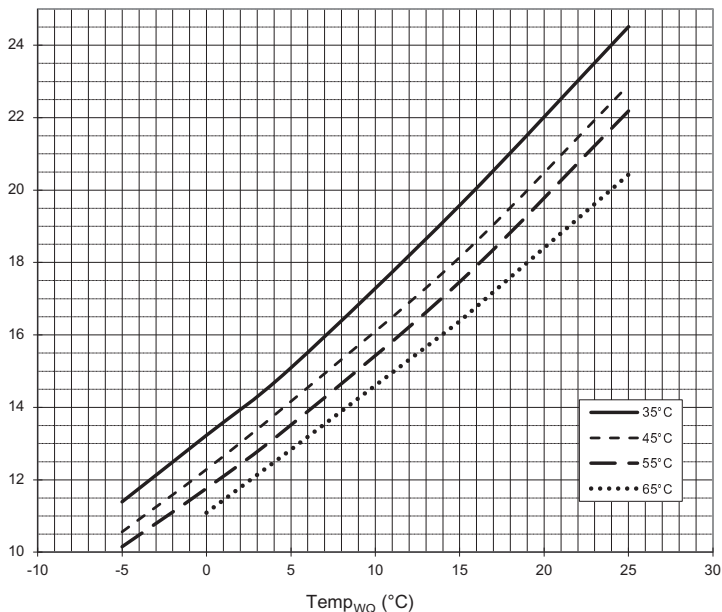


COP

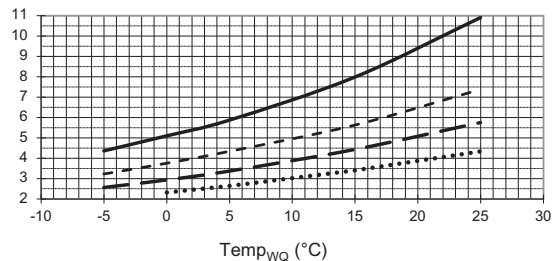


Pe (kW)

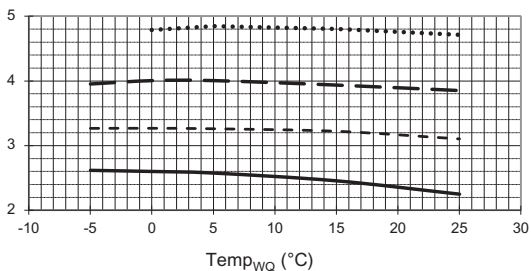

Δp_{HW} (bar)

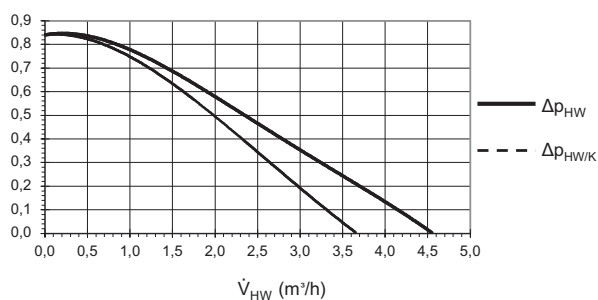

Δp_{WQ} (bar)

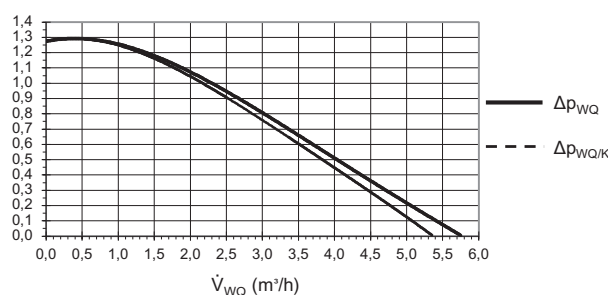






823244

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{WQ}	Heat source temperature
Qh	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

SWC 172(H)(K)3

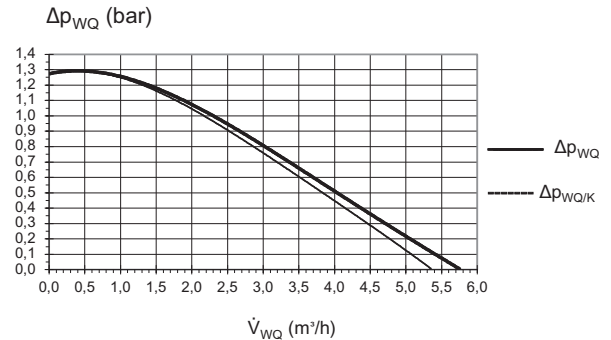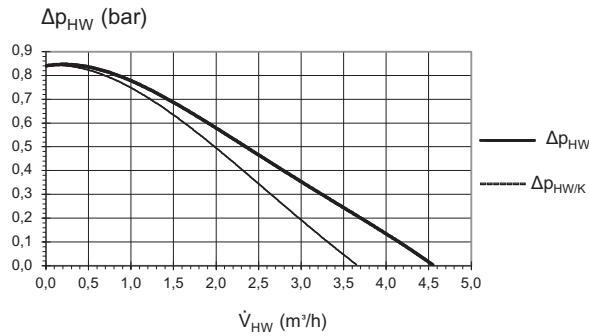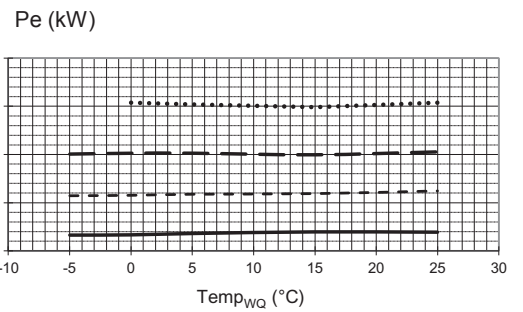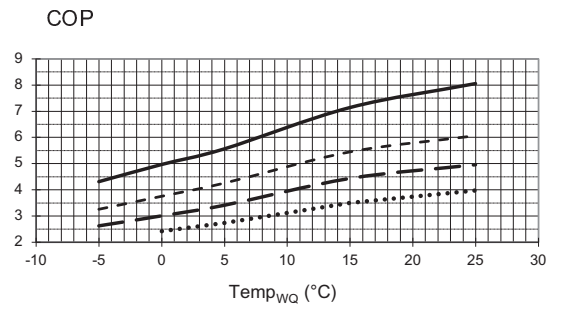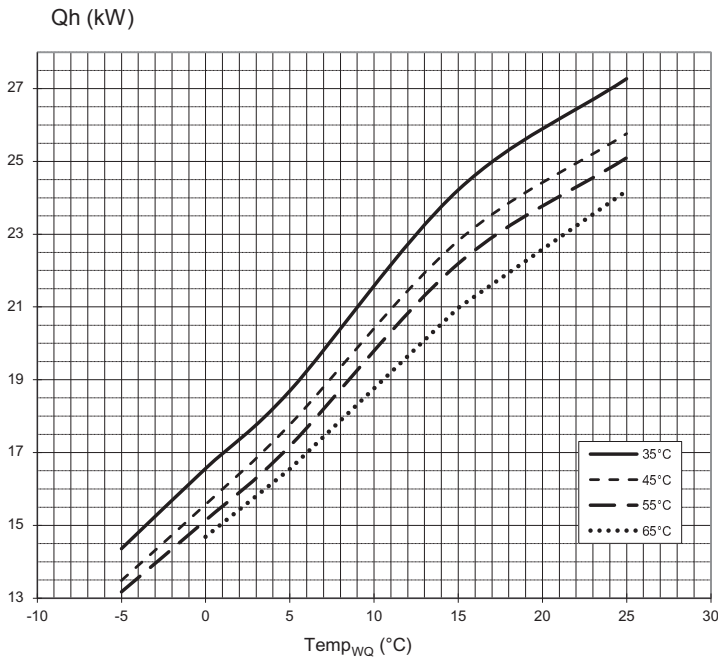






823245

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{WQ}$	Heat source temperature
Q_h	Heating capacity
P_e	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



SWC 192(H)(K)3

Performance curves

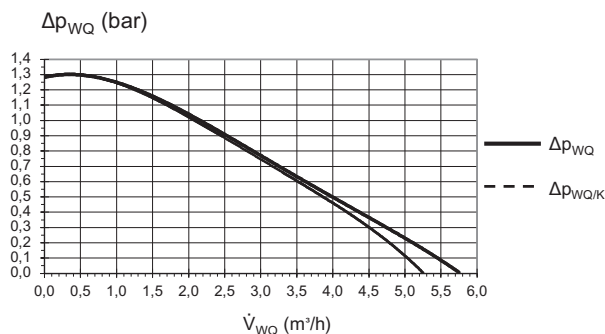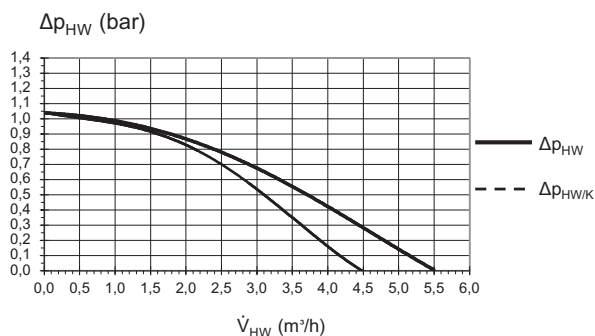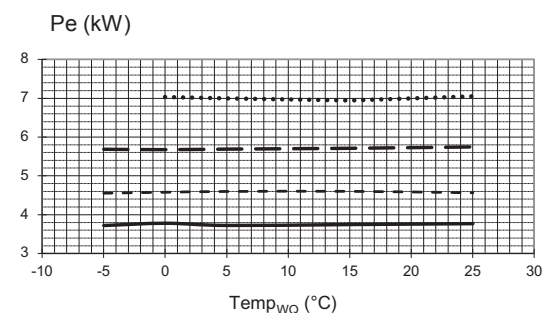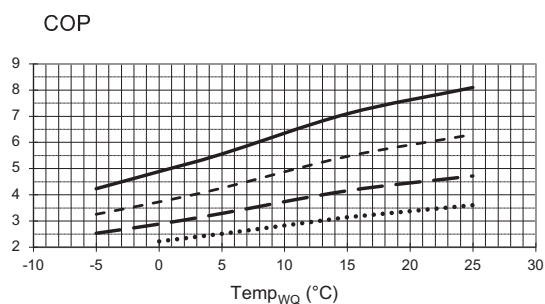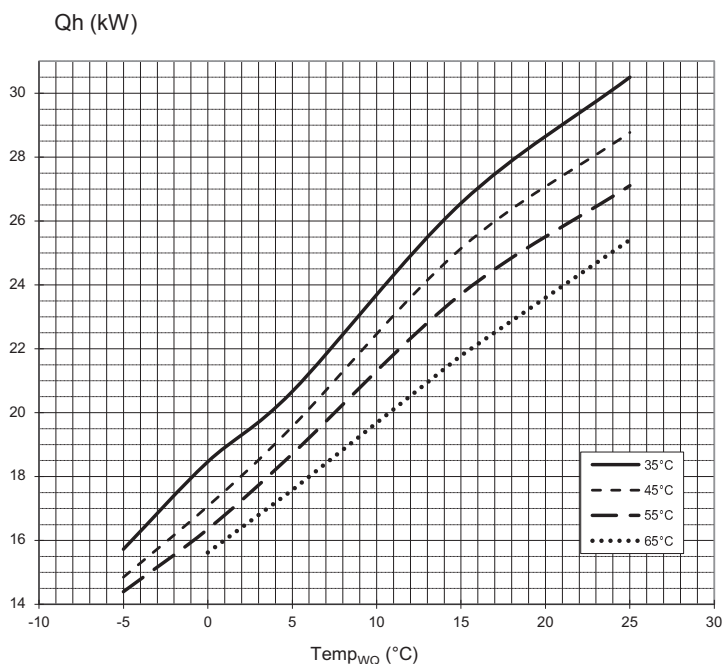

823246

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{WQ}	Heat source temperature
Q _h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure