

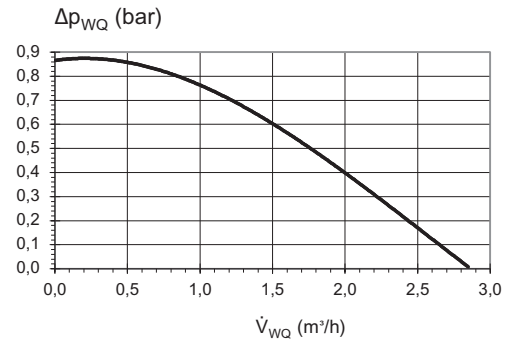
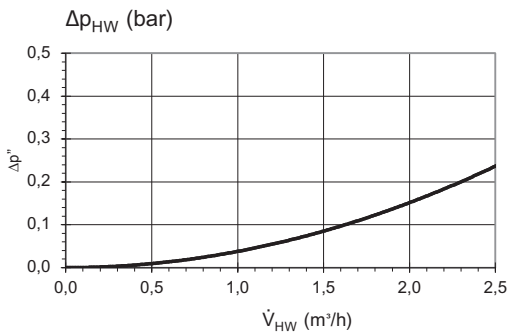
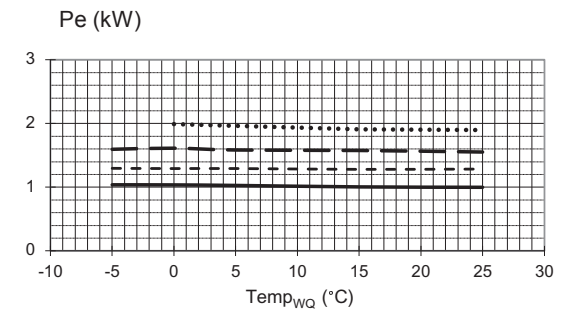


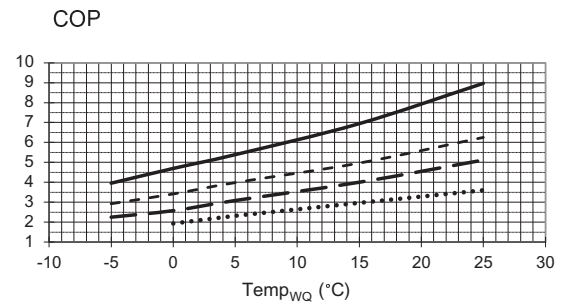

Performance curves

SW 42H3

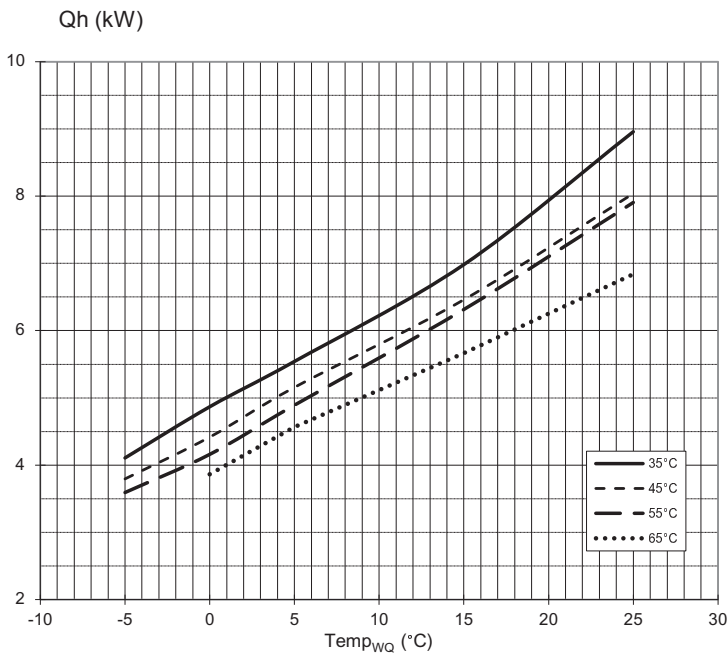






823247

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{WQ}	Heat source temperature
Q _h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



SW 62H3

Performance curves

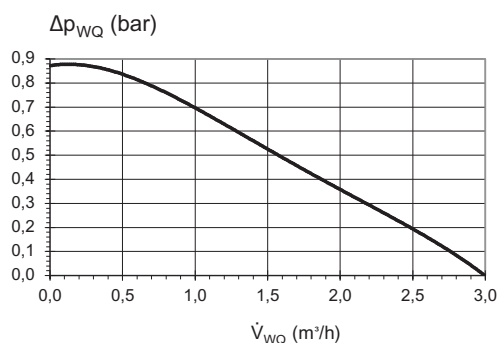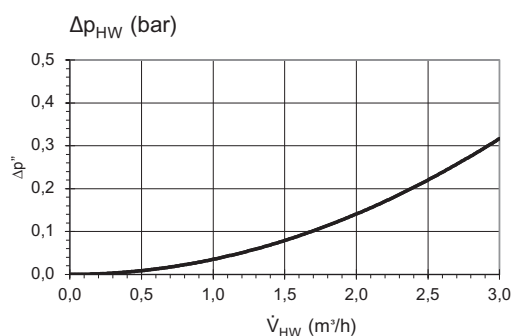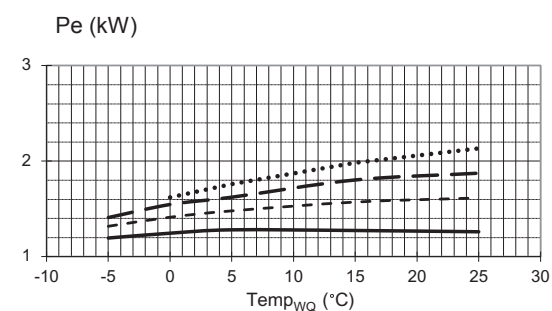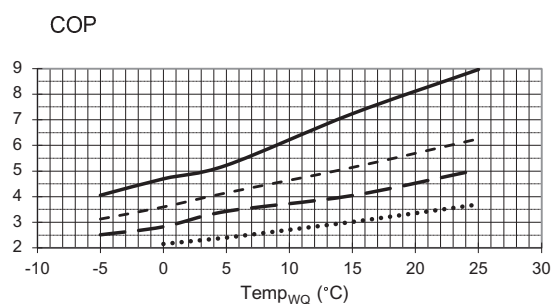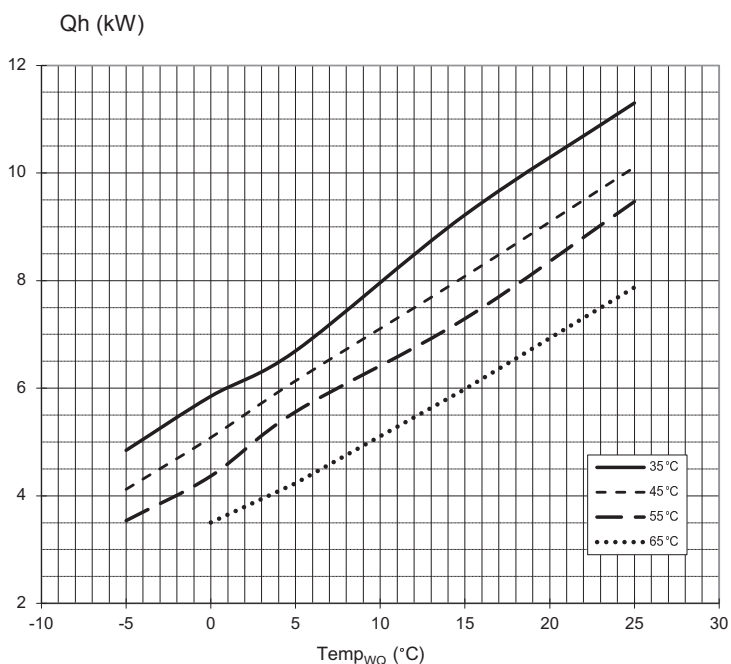






823248

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{WQ}	Heat source temperature
Q _h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

SW 82H3

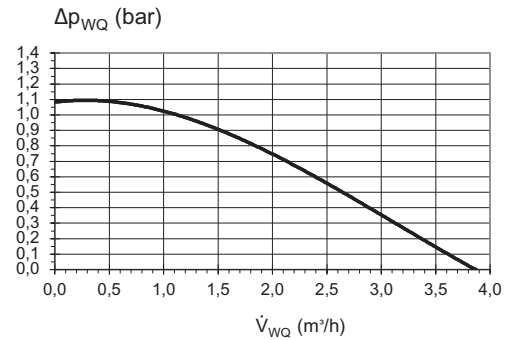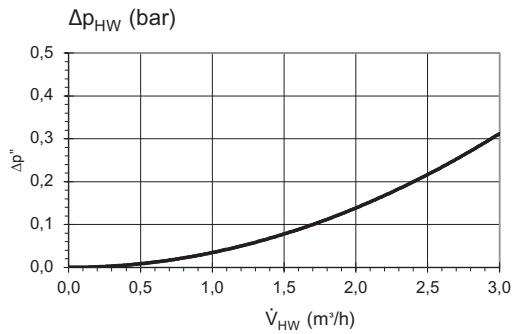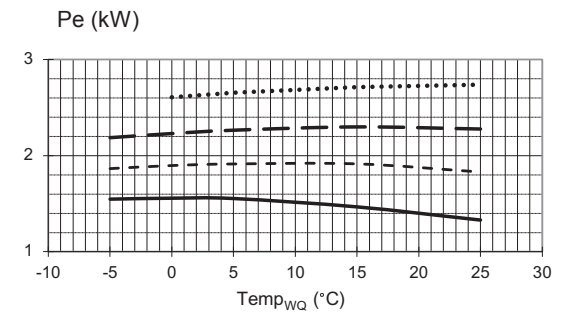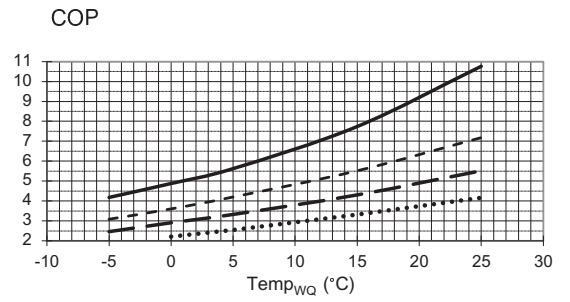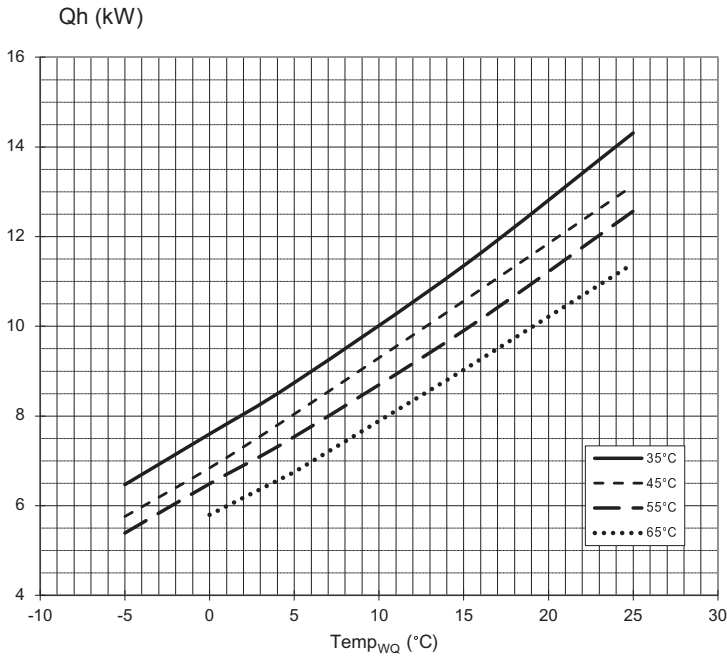






823249

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{wQ}	Heat source temperature
Q _h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{wQ} / \Delta p_{wQ/K}$	Heat source free pressure / Heat source with cooling free pressure



SW 102H3

Performance curves

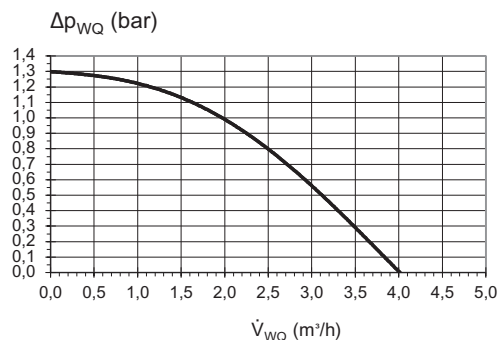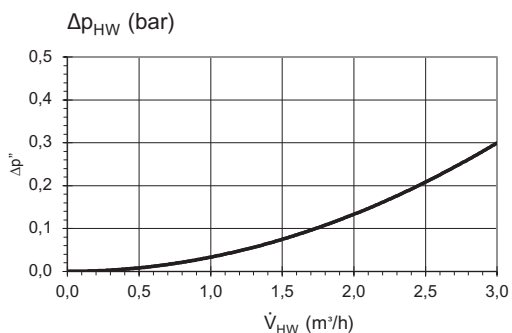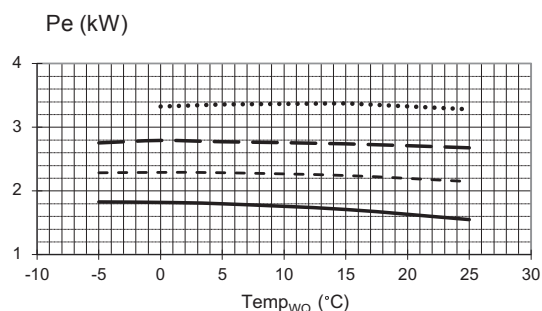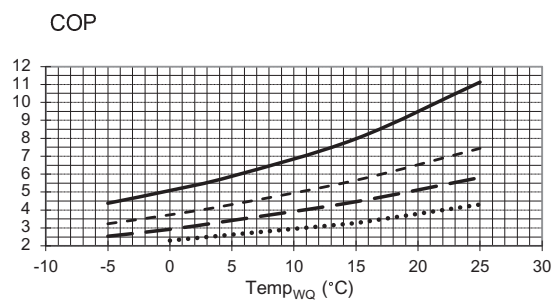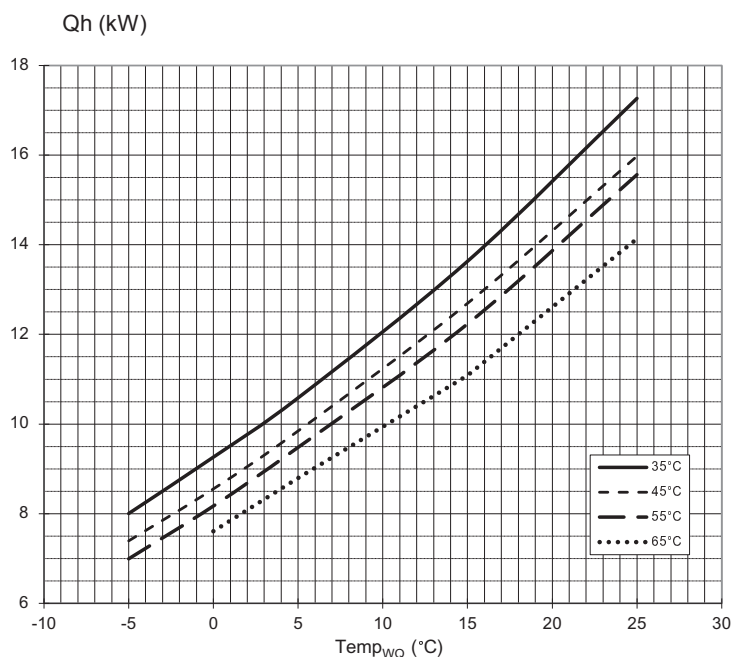






823250

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{WQ}$	Heat source temperature
Q_h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

SW 122H3

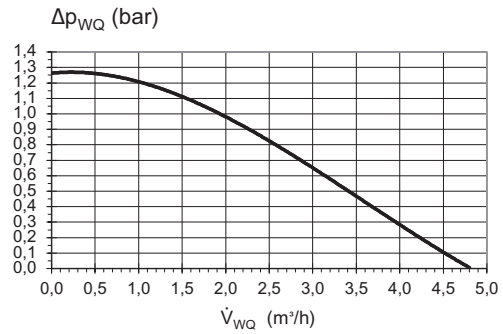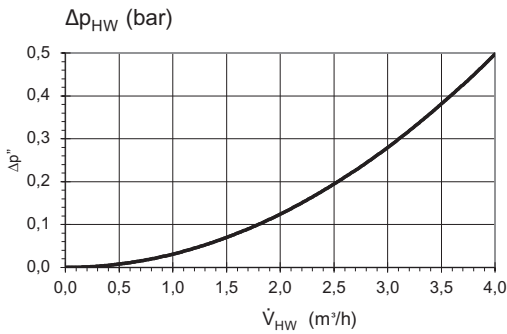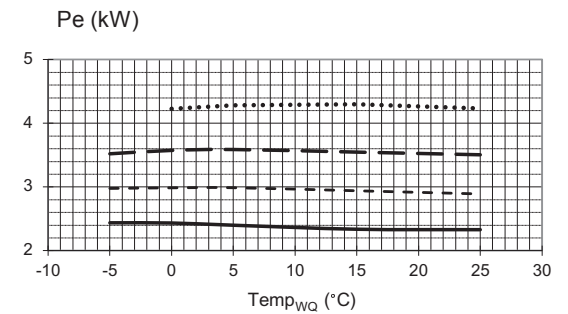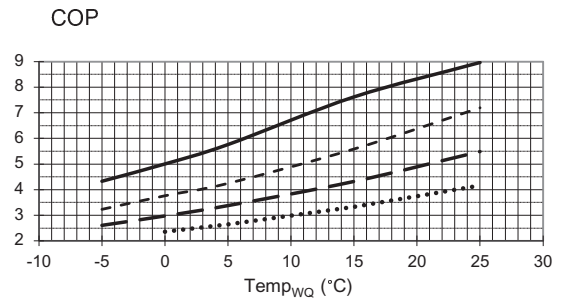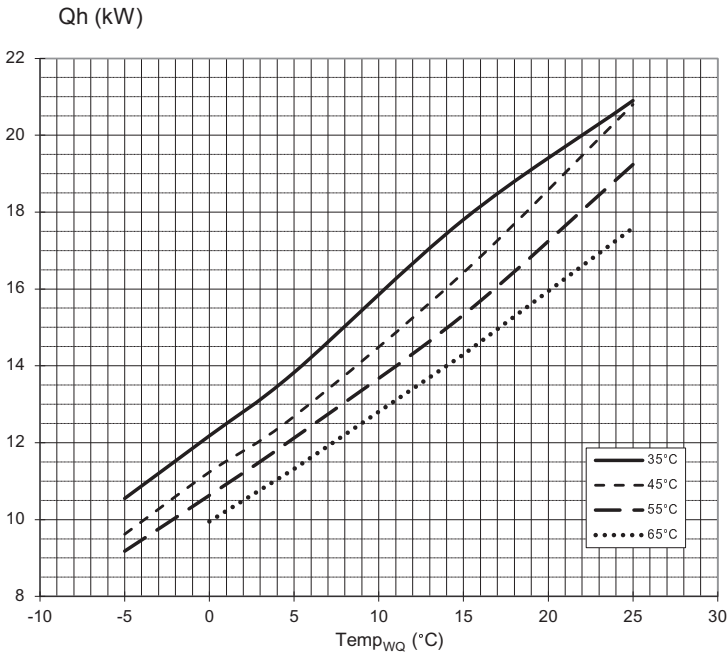






823251

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{WQ}	Heat source temperature
Q _h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



SW 142H3

Performance curves

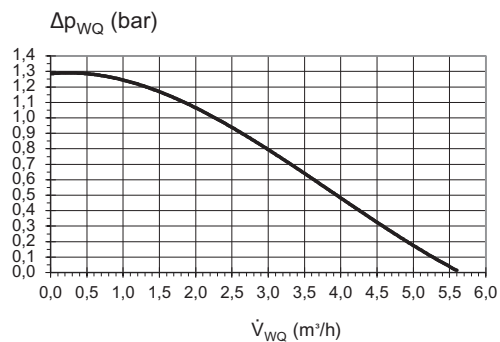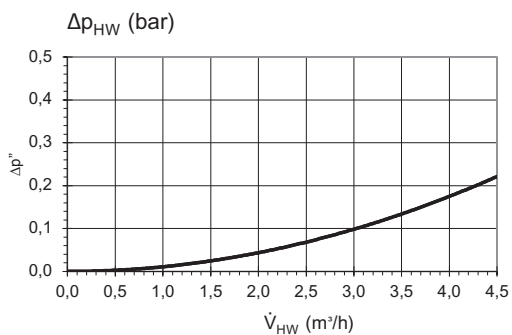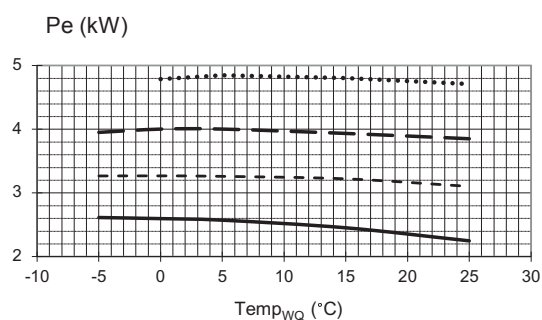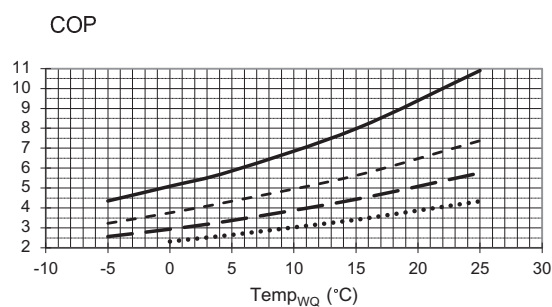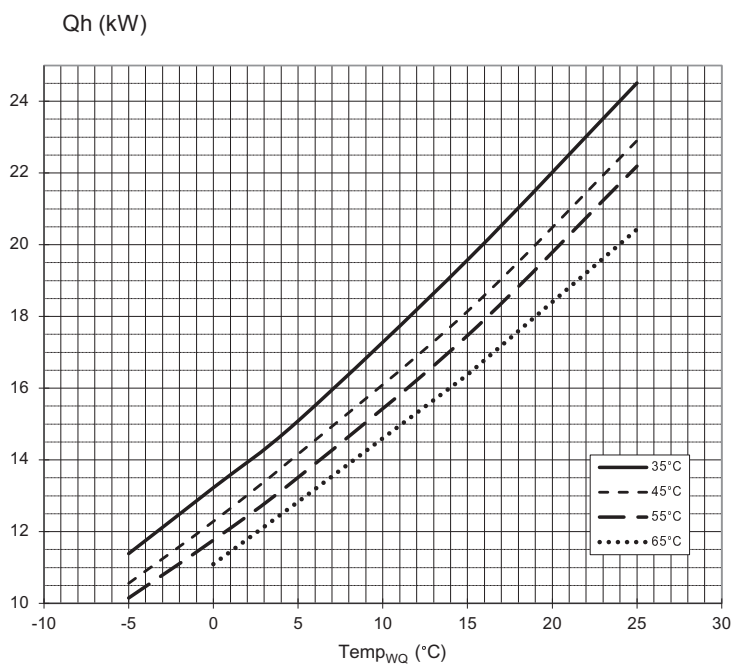






823252

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{WQ}$	Heat source temperature
Q_h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

SW 172H3

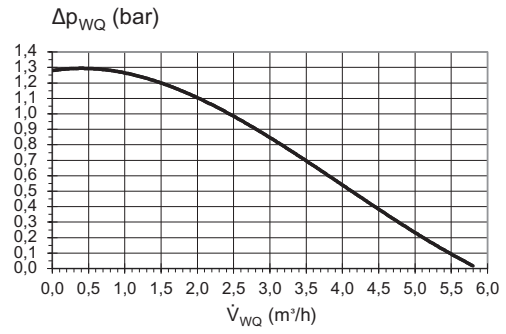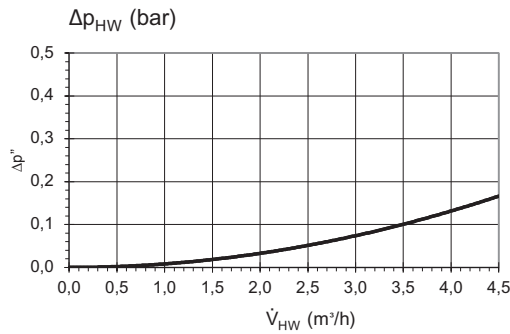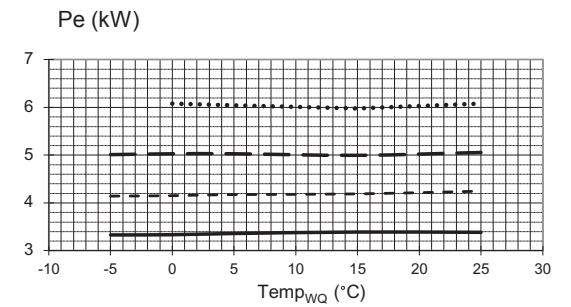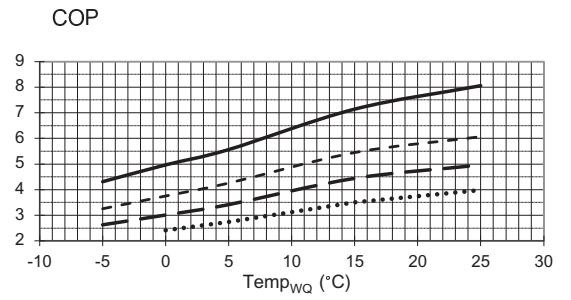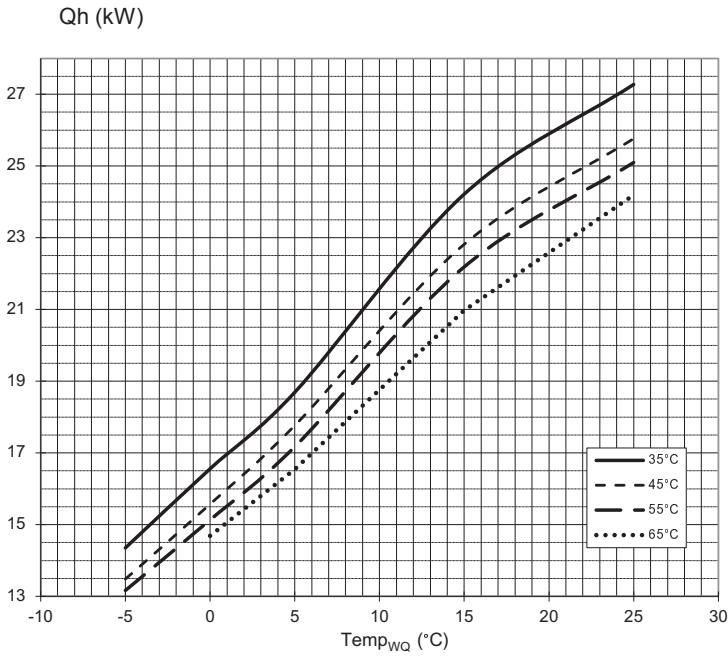






823253

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{WQ}	Heat source temperature
Qh	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



SW 192H3

Performance curves

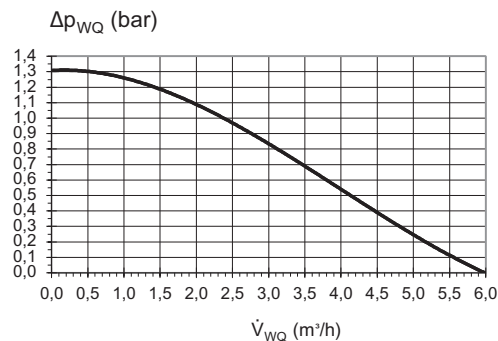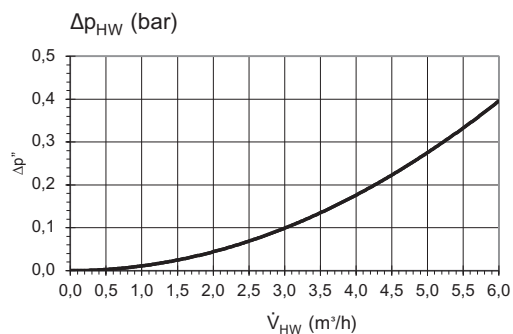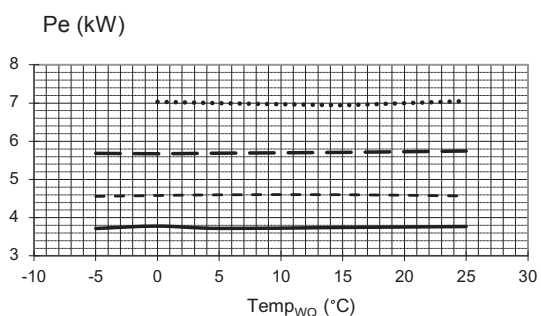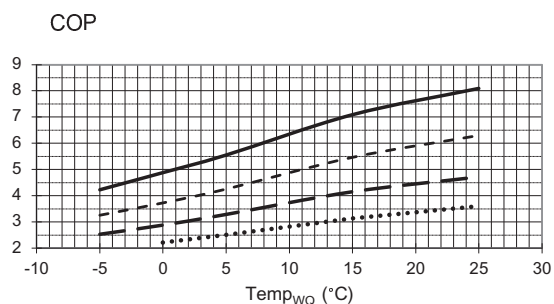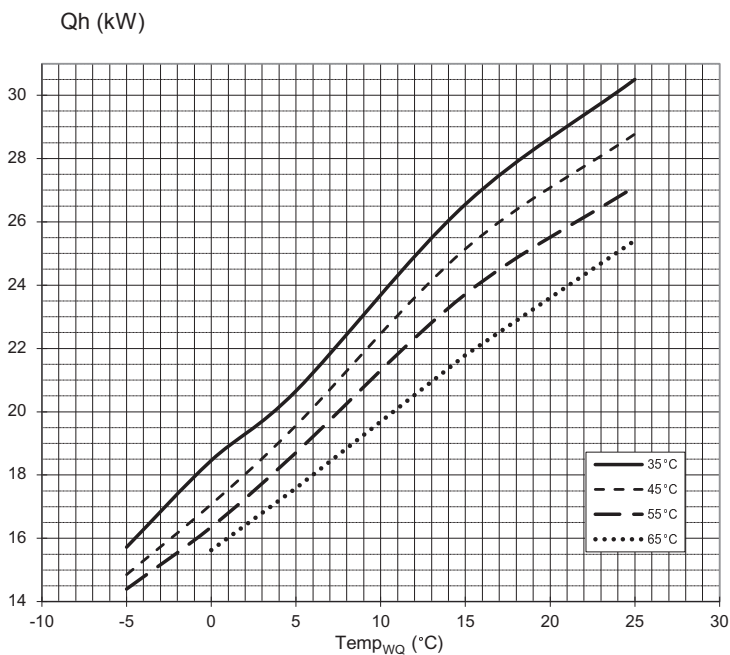

823254

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
Temp _{wQ}	Heat source temperature
Q _h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{wQ} / \Delta p_{wQ/K}$	Heat source free pressure / Heat source with cooling free pressure